

## DS-65VA300L Wireless Microphone



DS-65VA300L conference telephone based on internet communication , is a 2.4 G wireless digital conference, cooperating with software video system and video screen, such as Skype, QQ video or voice communication system, meeting with higher quality experience, making the meeting more efficient. It is suitable for all kinds of hardware video conference system, education training system, network monitoring system, remote medical system, network monitoring system, smart city system, conference recording system, etc.

### Features and Functions

#### Professional and Reliable


- 360-degree mic coverage
- 256ms acoustic echo cancellation
- Full duplex
- Dynamic Noise Reduction(DNR)
- Supporting Skype, Wechat, MSN and other online communication software
- Connecting by 3.5mm earphone plug, communication will be more private and do not trouble colleague
- No need driver; clear, unmixed and not harsh sound quality;
- Elegant business appearance



# Specifications

<b>Model</b>	DS-65VA300L	
<b>B</b>	LED Backlight	
<b>Color</b>	10 bit, 1.07B	
<b>Indicator LED</b>	<ul style="list-style-type: none"> <li>• triangle indicator on: working</li> <li>• left indicator on: speaker mute</li> <li>• right indicator on: MIC mute</li> <li>• left indicator flashing: volume adjusting</li> <li>• right indicator in orange: full charge</li> </ul>	
<b>USB adapter</b>	<ul style="list-style-type: none"> <li>• 2.4 G RF and data processing</li> <li>• folding SMA antenna</li> </ul>	
<b>Architecture</b>	<ul style="list-style-type: none"> <li>• Tabletop console contains audio processing functions ,USB function, indicator and key function</li> <li>• Built-in lithium battery(7-10h)</li> <li>• 2.4G wireless USB adapter</li> <li>• USB power line</li> <li>• USB charging plug(optional)</li> </ul>	
<b>Power</b>	USB supply(DC 5V/500mA) Built-in lithium battery	
<b>Loudspeaker</b>	3-inch anti-magnetic speaker	
<b>Microphone</b>	Cardioid microphones 0-8000Hz	
<b>Color</b>	Black	
<b>Size</b>	155*148*37mm	
<b>Weight</b>	340g	
<b>Keypad</b>	<ul style="list-style-type: none"> <li>• microphone mute key</li> <li>• loudspeaker mute key</li> <li>• volume up/down keys</li> <li>• standby key</li> </ul>	
<b>Computer system</b>	Windows 8/ Windows 7/ Windows 10/ Windows XP/.,ect	
<b>Audio</b>	<ul style="list-style-type: none"> <li>• Digital audio processing</li> <li>• 256ms echo cancellation</li> <li>• Dynamic noise reduction</li> <li>• full duplex</li> <li>• 360 degree pick-up range</li> </ul>	
<b>Recommended conditions</b>	Temperature	5° ~44°
	humidity	20~85% condensation free
	noise level	<48db
	storage temperature	-10° ~55°
	Reverberation time	<0.5 seconds
<b>Network interface</b>	USB	USB 2.0(compatible with USB 1.1)
	Audio interface	3.5mm audio interface(out)
<b>*Note</b>	All specifications mentioned above are subject to the actual product	

# Typical applications

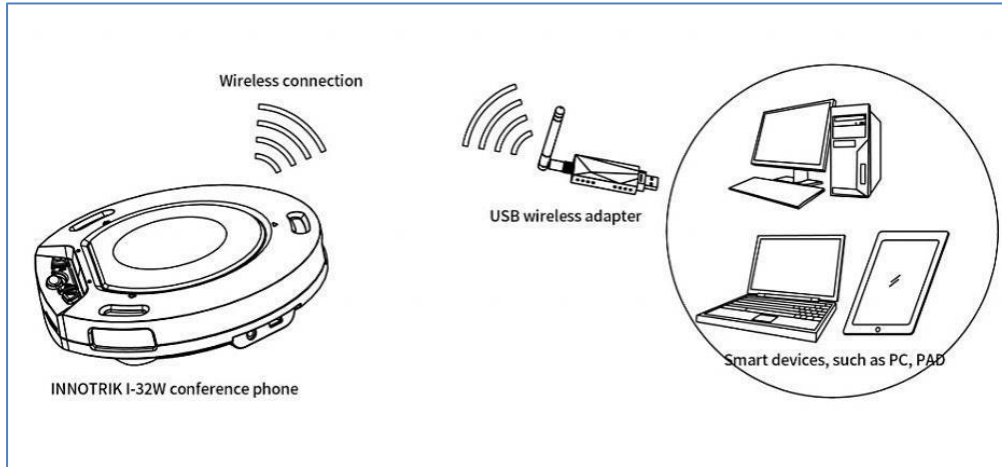

Distributed by



## **HIKVISION®**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Africa**  
T +27 (0) 0351172  
sale.africa@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761