

IN05 & IN05-A

Fingerprint Recognition TA & Access Terminal



IN05 is a fingerprint identification time & attendance and access control terminal, which can connect with third party electric lock, door sensor and exit button etc.

Communicating via Wi-Fi, TCP/IP, 3G and USB host, it ensures a smooth connection and data transfer.

It's associated with ZK new fingerprint reader, the operation remains stable under strong light source and high preciseness of verification of wet and rough fingers. Amazing verification speed and intuitive Operation process make it popular. It will match your slap-up office perfectly.

Features



Build in PoE



1 channel auxiliary input for smoke detector connection



Build in battery, up to 4 hours



Multiple communicate mode, Wi-Fi, TCP/IP, 3G, USB host



Stable operation under strong light source




Advance access function including Lock connection, alarm, Wiegand input/output

Specifications

| | | | |
|----------------------|--------------------------|--|----------------------|
| Product | | IN05 | IN05-A |
| Main | Biometric | Fingerprint | |
| | RF Optional | 125kHz EM / 13.56MHz MF | |
| Capacity | Max User(1:N) | 10,000 | |
| | Max Fingerprint (1:N) | 3,000 standard / 10,000 Optional | |
| | Max Record | 100,000 | |
| Interface | TCP/IP | 10/100 M | |
| | PoE Optional | 802.3 at 28W | |
| | Wi-Fi | 802.11 B/G/N | |
| | 3G Optional | WCDMA | |
| | USB | USB 2.0 (Host) | |
| | RS232 | 1 port for external printer | |
| | RS485 | | 1 port for FP reader |
| | Relay | | 2 relays |
| | Wiegand | - | 1ch In & Out |
| Input | | 1 Input | |
| Hardware | LCD | 3.0" Color LCD | |
| | Sound | 24-bit | |
| | Operating Temp. | 0 °C - 45 °C | |
| | Operating Humidity | 20% ~ 80% | |
| | Power | DC 12V 1.5A | DC 12V 3A |
| | Dimensions(W x H x D mm) | 213*155*107.81mm | |
| | Certificates | CE, FCC, RoHS | |
| Function | Standard | Automatic Status Switch, Self-Service Query, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID, Lock, sensor, Exit button | |
| | Optiona | ID / MF, ADMS | |
| Compatibility | | ZKTime.net 3.0, ZKAccess 3.5, BioTime 8.0 | |

Configuration

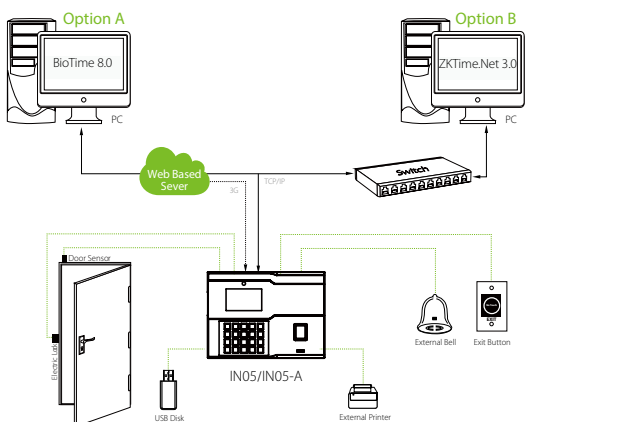

Dimensions (mm)

